




तमसो मा ज्योतिर्गमय  
Leading from Darkness to Light

# Street Light

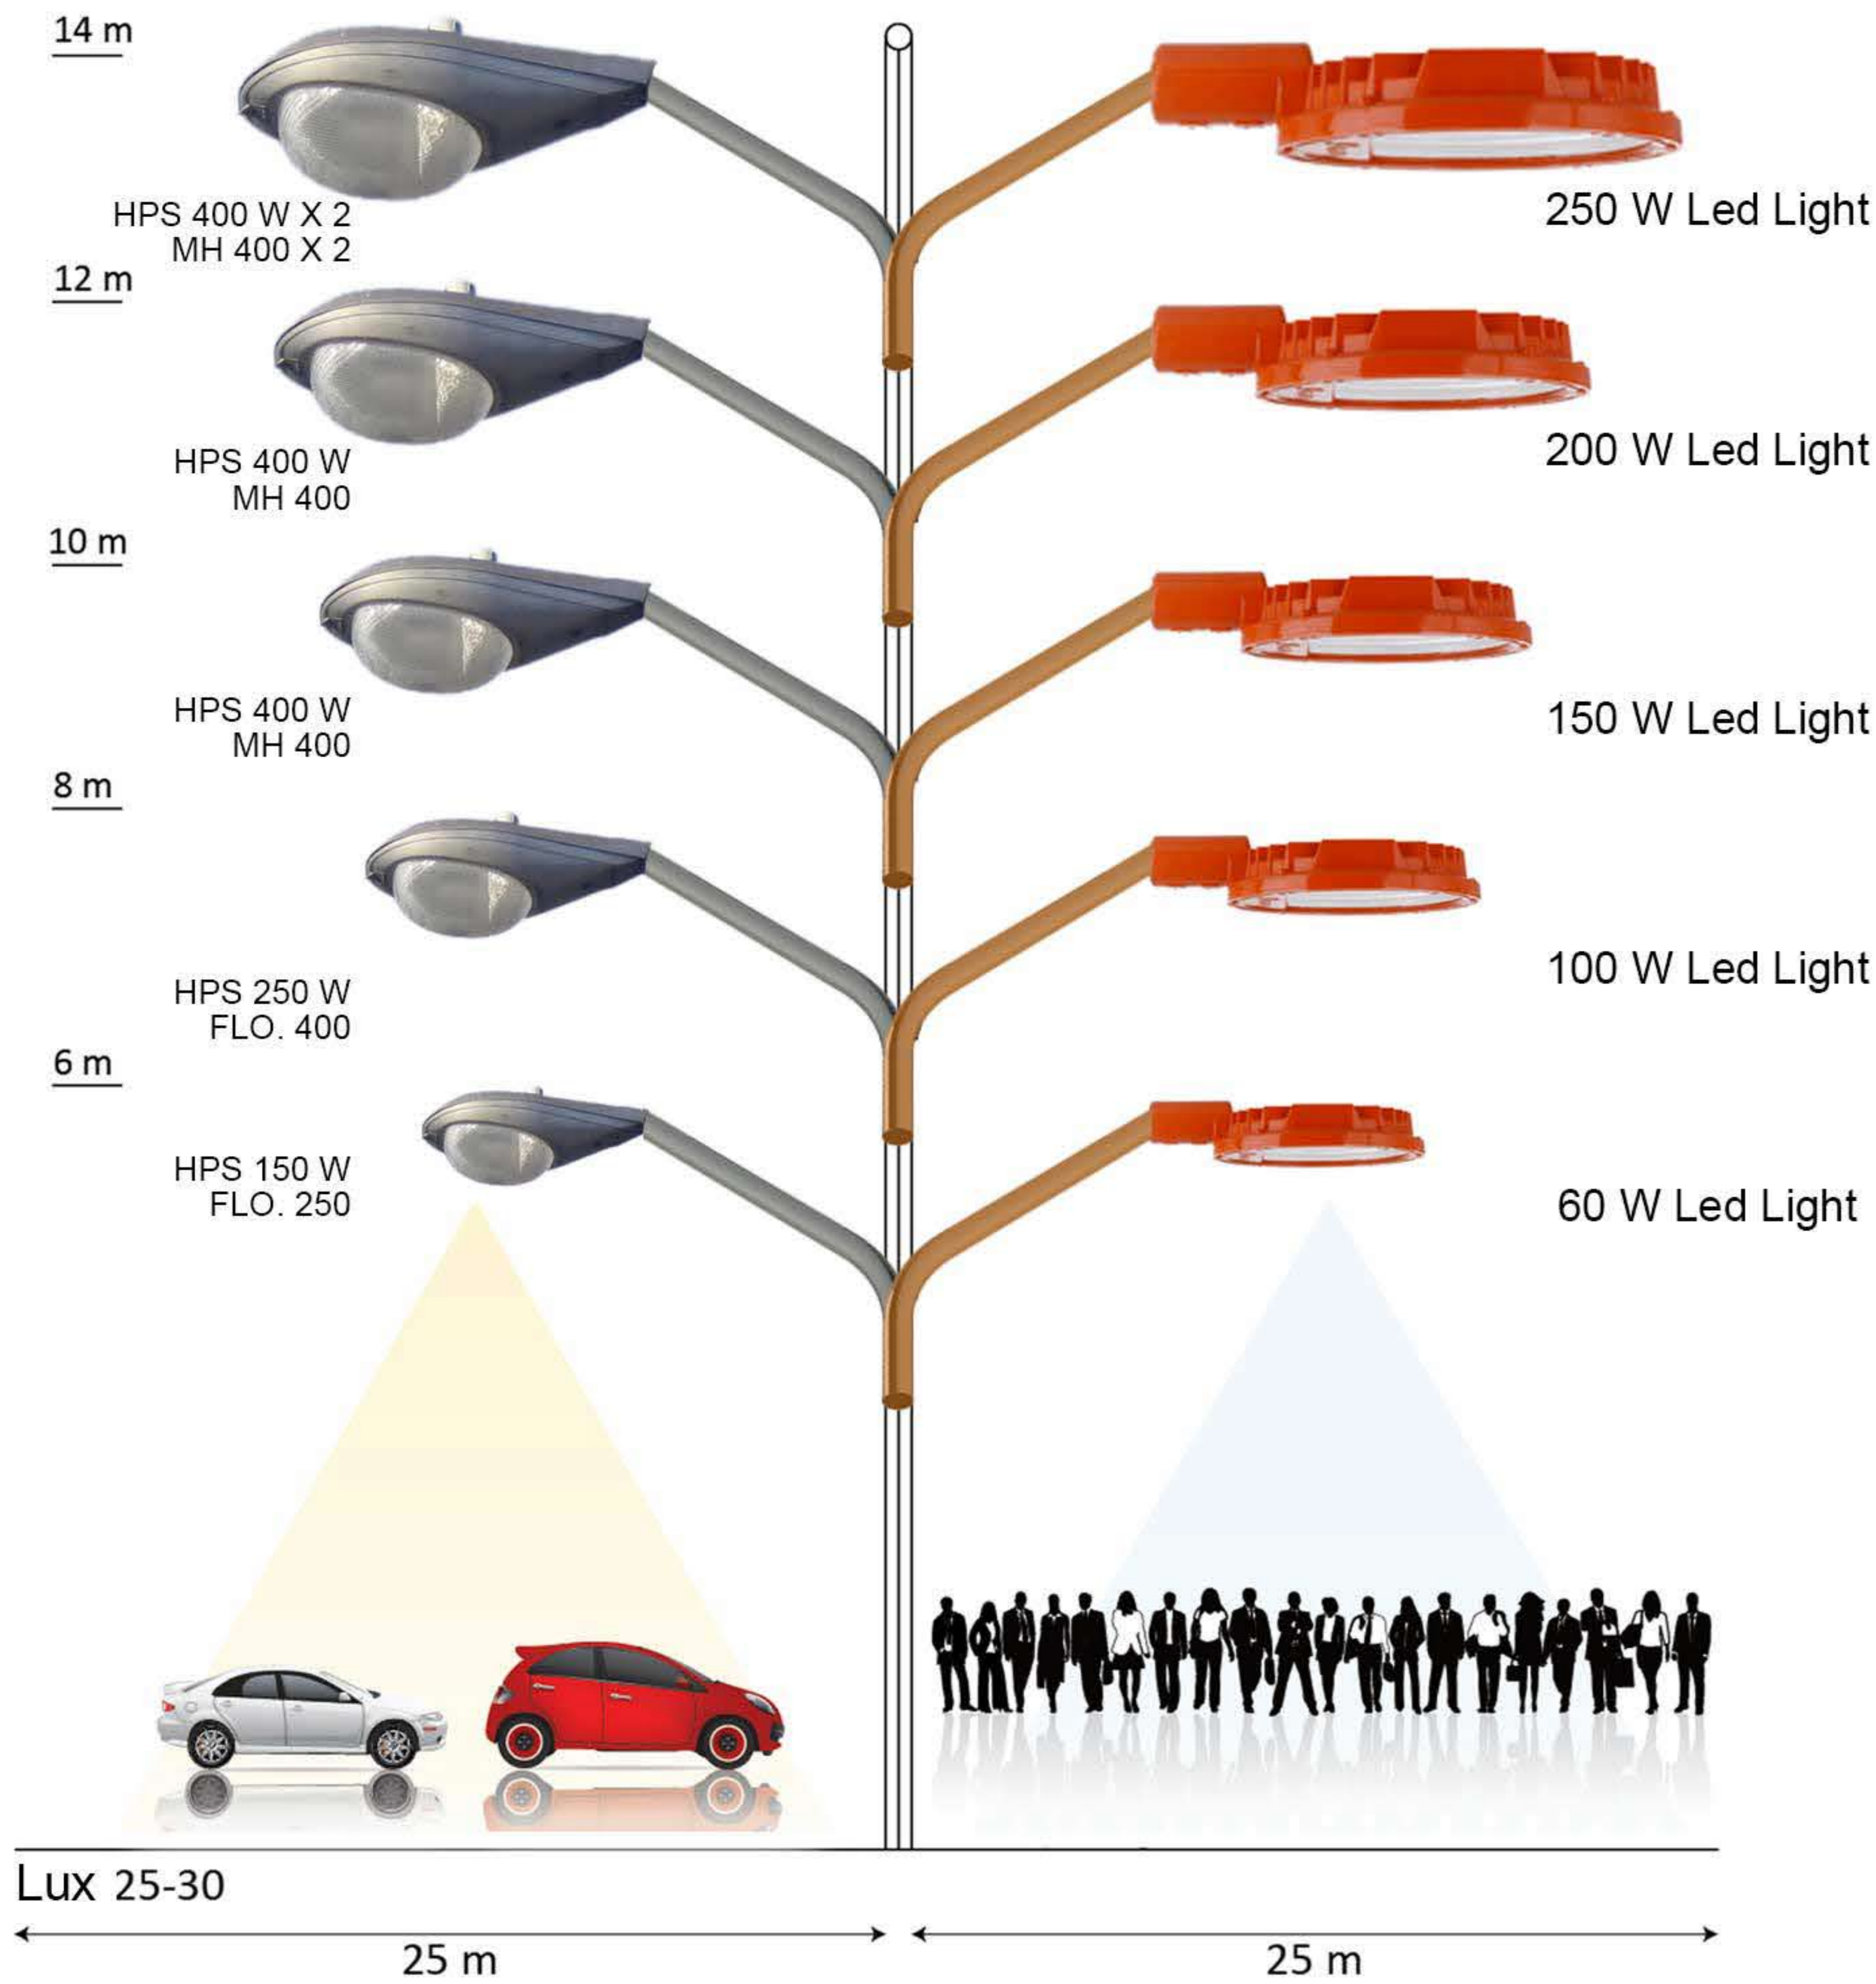

- Applications
- Street
  - Gates / Entry Point
  - Road Lighting

Products Code	Watt rating	Lumens	l/m WATT	CRI	CCT	Pf	Beam Angle	SV in KV	THd	IP rating	Lifetime	Base	Body type	Size in mm	Packing
LUA4 10	10	1200	120	>70	6500	>0.9+	120	2.5-10	<15%	IP67	35 K Hrs	PM	ADC	310x180	2
LUA4 20	20	2400	120	>70	6500	>0.9+	120	2.5-10	<15%	IP67	35 K Hrs	PM	ADC	310x180	2
LUA4 50	50	6000	120	>70	6500	>0.9+	120	2.5-10	<15%	IP67	35 K Hrs	PM	ADC	420x270	2
LUA4 60	60	7200	120	>70	6500	>0.9+	120	2.5-10	<15%	IP67	35 K Hrs	PM	ADC	420x270	2
LUA4 90	90	10800	120	>70	6500	>0.9+	120	2.5-10	<15%	IP67	35 K Hrs	PM	ADC	420x270	2
LUA4 120	120	14400	120	>70	6500	>0.9+	120	2.5-10	<15%	IP67	35 K Hrs	PM	ADC	420x270	2

\*CCT available on demand (4500, 3000, 2700)  
SVP: Surge Voltage Protection  
ADC: Aluminium Die Casting  
PC : Poly Carbonate  
PM: Pole Mounted